



PARTS CATALOGUE / TECHNICAL GUIDE

Cal. W855A


[SPECIFICATIONS]

Item		Cal. No.	W855A
Module			  <p style="text-align: right;">(x 1.0)</p>
Module size	Outside diameter		ø29.0 mm
	Casing diameter		-
	Height		6.0 mm (Including the battery portion)
Display medium			Nematic Liquid Crystal, FEM (Field Effect Mode)
Liquid crystal driving system			Multiplex driving system
Display system			<ul style="list-style-type: none"> • Time/calendar display • Stopwatch display (Up to 9 hours, 59 minutes, 59 seconds and 29 in 1/30 seconds < SMPTE >) • Alarm display (5-channel daily alarm) • World time display (38 cities, DST) • Metronome (BPM) display
Additional mechanism			<ul style="list-style-type: none"> • Selection of a desired mode in the menu display • Changeover between the normal and enlarged displays • Quick digits moving function • Graphic display, scroll display and motion graphic demonstration function • Auto illumination function • Electroluminescent panel • Battery life indicator • Sound demonstration • Changeover between 12- and 24-hour indications
Loss/gain			Monthly rate at normal temperature range: less than 20 seconds
Regulation system			Nil
Measuring gate by quartz tester			Any gate can be used.
Battery			SEIKO CR2025, Sony CR2025, Matsushita CR2025 Battery life is approximately 2 years. Voltage: 3.0 V

SEIKO CORPORATION

PARTS CATALOGUE

Cal. W855A

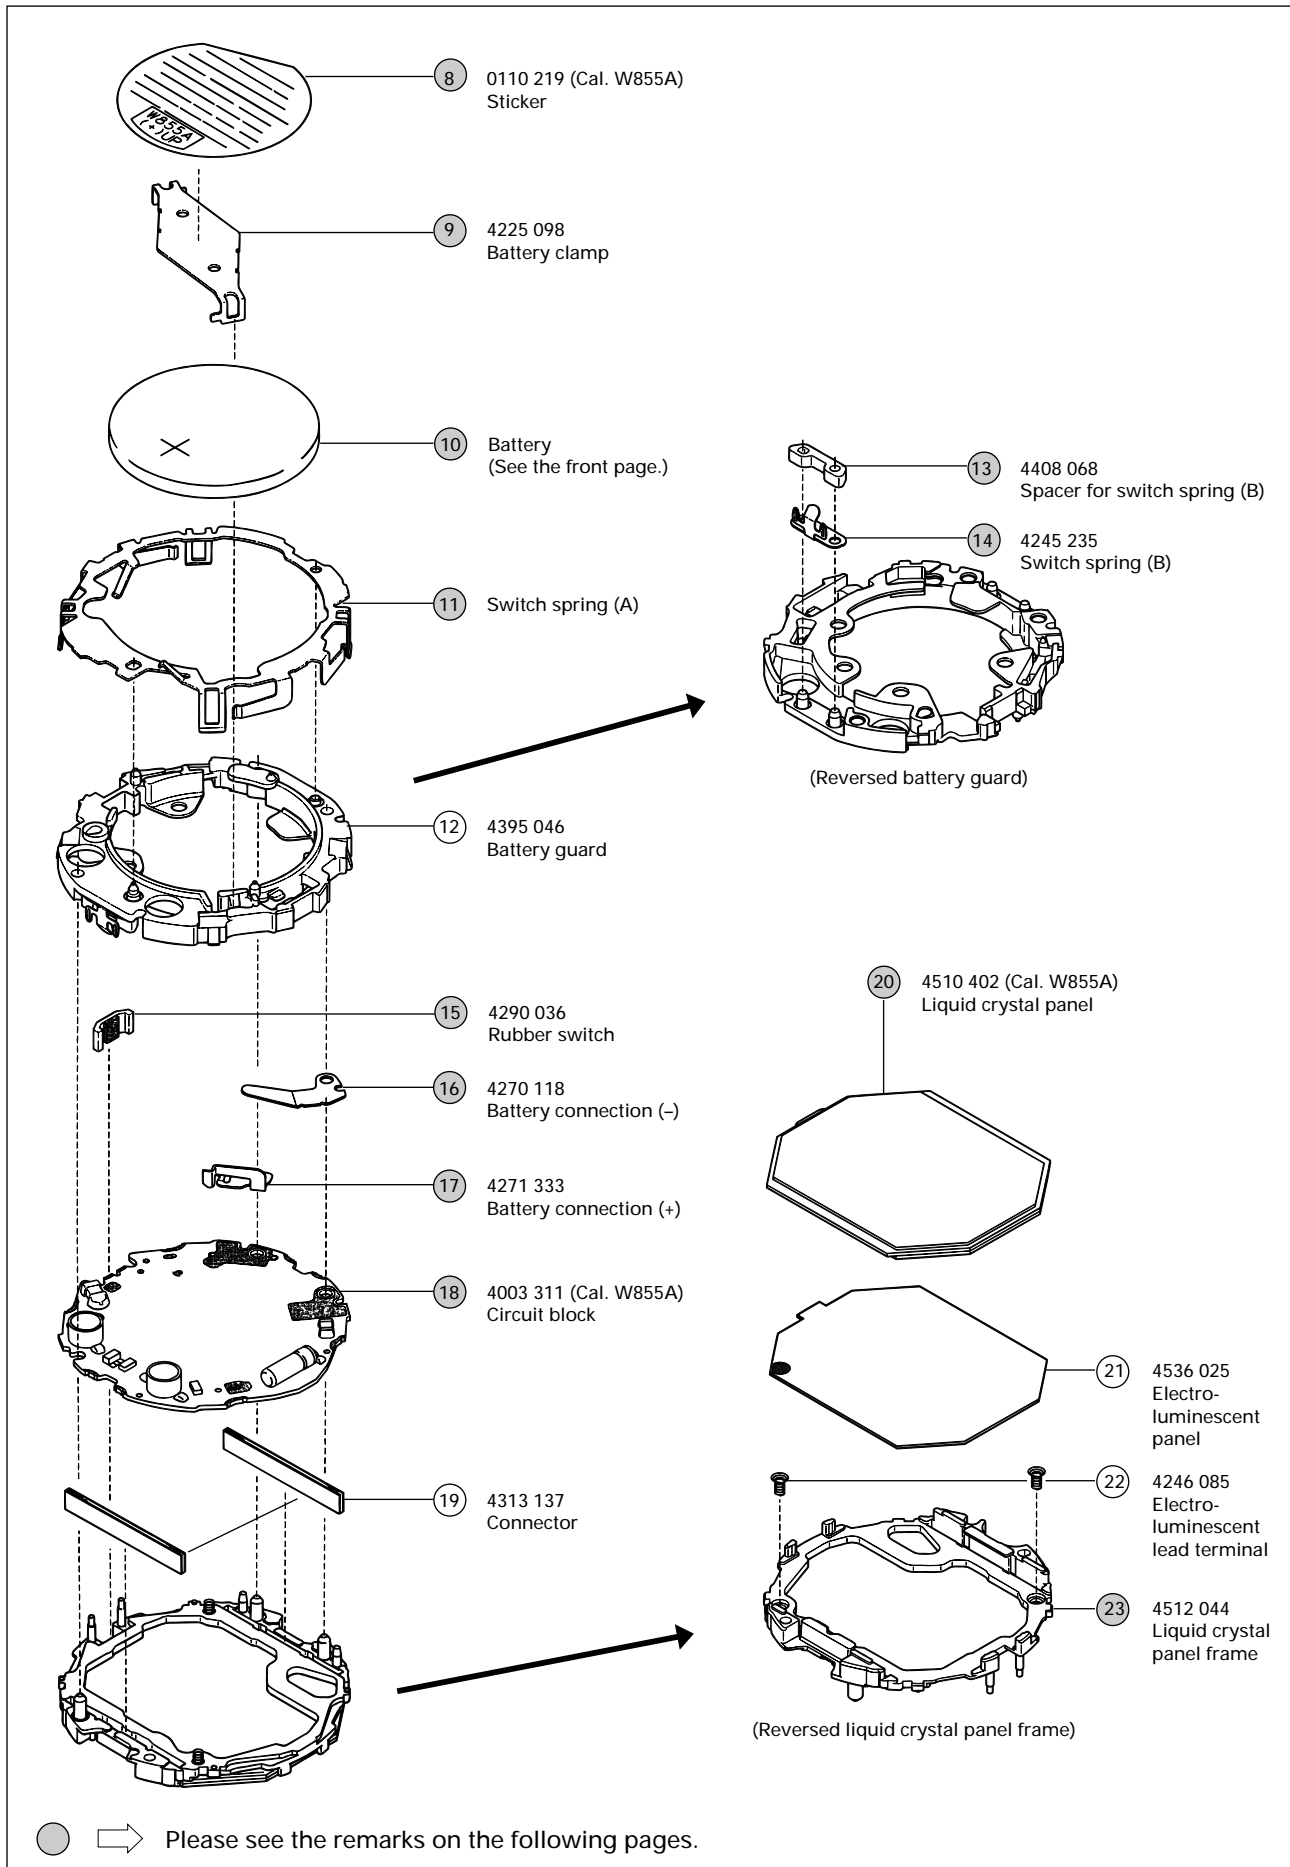

● For other pages, please refer to "PARTS CATALOGUE / TECHNICAL GUIDE Cal. W850A, W851A, W853A, W854A".